



BittWare
a **molex** company

TeraBox 1400DN
1U FPGA Server

Extreme Density 1U FPGA Server Integrated into Dell C4140

At the extreme of FPGA server density, the TeraBox 1400DN gives the highest level of compute and network capability in a 1U chassis. This server provides up to 3.2 Terabits/second of I/O and the power of 4 of our largest Achronix Speedster7t, Intel Stratix 10 or Xilinx UltraScale+ FPGAs.

This innovative product is made possible through a powerhouse partnership of integrated technologies from Intel, Dell EMC and BittWare.

Chassis by
DELLEMC




Four Achronix Speedster7t, Intel Stratix 10 or Xilinx UltraScale+ FPGA cards

key features

Up to
16 QSFP-DDs
for 32x 100G or
128x 10/25G

1U
4 FPGAs in a
1U server

Standard Height
Double Slot
Support for BittWare's full
range of FPGA cards

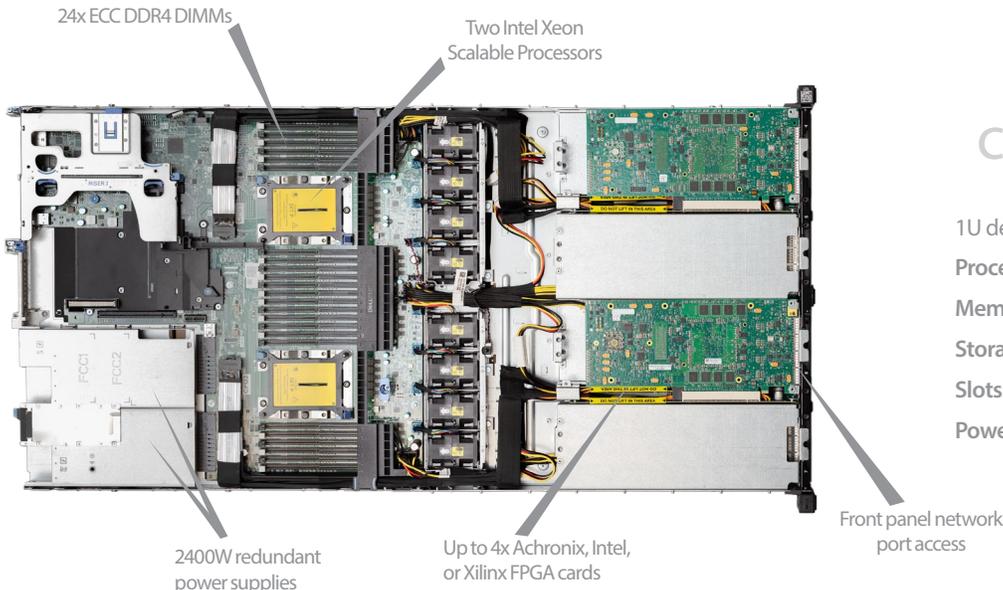

chassis key specs

- 1U depth, 36.46 in (92.62 cm)
- Processor: Intel® Xeon® Scalable Processors
- Memory: 24x DDR4 DIMMs
- Storage: IDSDM or Internal M.2 Boot Module (2 x M.2)
- Slots: 4x PCIe Gen3 x16
- Power supply: 2400W redundant

TeraBox 1400DN

1U FPGA Server

BittWare FPGA Cards

The TeraBox 1400DN supports up to four dual-slot BittWare PCIe FPGA cards. Choose from a variety of cards based on the Speedster 7t, Stratix 10, or UltraScale+ FPGAs. System specs will vary greatly, depending on the FPGA card you select. For example, with four BittWare UltraScale+ PCIe cards, which support up to 512 Gbytes of DDR4 per card, the chassis can support as much as 2 Terabytes of DDR4 on the FPGA cards in 16 banks. With four Stratix 10 cards, each chassis supports 10 million logic elements.

Dell EMC C4140 1U Server

Dell's C4140 rackmount 1U server featuring dual Intel Skylake processors is the ideal platform to unleash the energy-efficient acceleration of BittWare's FPGA cards. This FPGA-optimized 1U server delivers unrivaled performance density and value for a range of compute-intensive applications, including machine learning.

The TeraBox Advantage

Choosing a TeraBox FPGA server means knowing you are getting a pre-configured and tested solution. This includes setup and installation of your FPGA cards and associated hardware, your choice of operating system, and development tools. Your TeraBox arrives ready for use—giving your team more time for development and deployment.

Example System Configuration

The TeraBox 1400DN supports many of BittWare's Achronix, Intel or Xilinx FPGA-based PCIe cards. The table below lists system totals when populated with four cards*:

	FPGA	Cards in Server	Memory	I/O	Processing
S7t-VG6	Speedster7t	4	<ul style="list-style-type: none">32 banks GDDR6 (up to 32 GBytes)	<ul style="list-style-type: none">1.8 Terabits/sec24x 100/50/40/25/10 GbE	<ul style="list-style-type: none">2.75 million 6-input lookup tables (LUTs)750 Mbits embedded RAM
520N-MX	Stratix 10 MX	4	<ul style="list-style-type: none">8 banks DDR4 (up to 1 Terabyte)16 banks QDRII+ (up to 2.3 Gbits)	<ul style="list-style-type: none">1 Terabit/sec16x 100/50/40/25/10 GbE	<ul style="list-style-type: none">8.4 million system logic elements64 GBytes HBM2
XUP-VV8	UltraScale+ VU13P	4	<ul style="list-style-type: none">16 banks DDR4 (up to 2 Terabytes)32 banks QDRII+ (up to 9.2 Gbits)	<ul style="list-style-type: none">2.3 Terabits/sec32x 100/50/40/25/10 GbE	<ul style="list-style-type: none">15.2 million system logic cellsUp to 49.152 DSP slices

* Contact BittWare for additional FPGA card options.

Achronix



XILINX

Server Configurations

Low

- (2) Intel Xeon Silver 4114 Processors (2.2GHz, 10C/20T)
- 48GB DDR4
- (1) 1.6TB NVMe Flash
- 2400W Redundant Power Supplies

Medium

- (2) Intel Xeon Gold 5120 Processors (2.2GHz, 14C/28T)
- 96GB DDR4
- (1) 1.6TB NVMe Flash
- 2400W Redundant Power Supplies

High

- (2) Intel Gold 6150 Processors (2.7GHz, 18C/36T)
- 192GB DDR4
- (1) 1.6TB NVMe Flash
- 2400W Redundant Power Supplies

Ultra

- (2) Intel Xeon Platinum 8160 Processors (2.1GHz, 24C/48T)
- 768GB DDR4
- (2) 480GB M.2 SSD
- 2400W Redundant Power Supplies

Contact BittWare for additional server configuration options.

To learn more, visit www.BittWare.com

Rev 2020.02.24 | February 2020

© BittWare 2019

Speedster is a registered trademark of Achronix Semiconductor Corp. UltraScale, Virtex, and Vivado are registered trademarks of Xilinx Corp. Stratix 10 is a trademark of Intel Corp. All other products are the trademarks or registered trademarks of their respective holders.

BittWare
a **molex** company