

Please read this notice before using the TAIYO YUDEN products.

REMINDERS

- Product information in this catalog is as of October 2018. All of the contents specified herein are subject to change without notice due to technical improvements, etc. Therefore, please check for the latest information carefully before practical application or use of our products.

Please note that TAIYO YUDEN shall not be in any way responsible for any damages and defects in products or equipment incorporating our products, which are caused under the conditions other than those specified in this catalog or individual product specification sheets.

- Please contact TAIYO YUDEN for further details of product specifications as the individual product specification sheets are available.
- Please conduct validation and verification of our products in actual condition of mounting and operating environment before using our products.
- The products listed in this catalog are intended for use in general electronic equipment (e.g., AV equipment, OA equipment, home electric appliances, office equipment, information and communication equipment including, without limitation, mobile phone, and PC). Please be sure to contact TAIYO YUDEN for further information before using the products for any equipment which may directly cause loss of human life or bodily injury (e.g., transportation equipment including, without limitation, automotive powertrain control system, train control system, and ship control system, traffic signal equipment, disaster prevention equipment, medical equipment classified as Class I, II or III by IMDRF, highly public information network equipment including, without limitation, telephone exchange, and base station).

Please do not incorporate our products into any equipment requiring high levels of safety and/or reliability (e.g., aerospace equipment, aviation equipment, medical equipment classified as Class IV by IMDRF, nuclear control equipment, undersea equipment, military equipment).

When our products are used even for high safety and/or reliability-required devices or circuits of general electronic equipment, it is strongly recommended to perform a thorough safety evaluation prior to use of our products and to install a protection circuit as necessary.

Please note that unless you obtain prior written consent of TAIYO YUDEN, TAIYO YUDEN shall not be in any way responsible for any damages incurred by you or third parties arising from use of the products listed in this catalog for any equipment requiring inquiry to TAIYO YUDEN or prohibited for use by TAIYO YUDEN as described above.

- Information contained in this catalog is intended to convey examples of typical performances and/or applications of our products and is not intended to make any warranty with respect to the intellectual property rights or any other related rights of TAIYO YUDEN or any third parties nor grant any license under such rights.
- Please note that the scope of warranty for our products is limited to the delivered our products themselves and TAIYO YUDEN shall not be in any way responsible for any damages resulting from a fault or defect in our products. Notwithstanding the foregoing, if there is a written agreement (e.g., supply and purchase agreement, quality assurance agreement) signed by TAIYO YUDEN and your company, TAIYO YUDEN will warrant our products in accordance with such agreement.
- The contents of this catalog are applicable to our products which are purchased from our sales offices or authorized distributors (hereinafter “TAIYO YUDEN’s official sales channel”). Please note that the contents of this catalog are not applicable to our products purchased from any seller other than TAIYO YUDEN’s official sales channel.
- Caution for Export
Some of our products listed in this catalog may require specific procedures for export according to “U.S. Export Administration Regulations”, “Foreign Exchange and Foreign Trade Control Law” of Japan, and other applicable regulations. Should you have any questions on this matter, please contact our sales staff.

CYLINDER TYPE LITHIUM ION CAPACITORS



PARTS NUMBER

Hand soldering

Prohibition of wave/reflow soldering

L	I	C	1	0	3	0	R	S	3	R	8	2	0	6
①	②	③	④	⑤	⑥									

① Series name

Code	Series name
LIC	Lithium ion capacitor

② Dimensions (φ D)

Code	Dimensions (φ D) [mm]
10	10
12	12.5
18	18
25	25

③ Dimensions (L)

Code	Dimensions (L) [mm]
30	30
35	35
40	40

④ Characteristics spec

Code	Characteristic spec
RS	Low Resistance Type

⑤ Upper limit voltage


Code	Upper limit voltage [V]
3R8	3.8

※R=Decimal point

⑥ Nominal capacitance

Code	Nominal capacitance [F]
206	20
406	40
107	100
277	270

EXTERNAL DIMENSIONS

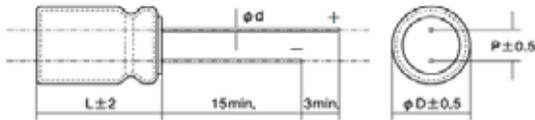

Part number	φ D	L	φ d	P
LIC1030RS3R8206	10	30	0.6	5.0
LIC1235RS3R8406	12.5	35	0.8	5.0
LIC1840RS3R8107	18	40	0.8	7.5
LIC2540RS3R8277	25	40	1.0	12.5

Unit : mm

SPECIFICATIONS

Part number	Operating temp. range [°C]	Upper limit voltage [V]	Lower limit voltage [V]	Initial capacitance [F]	Initial DCR [mΩ]	Temperature characteristics			
						-30°C		+70°C/+85°C	
						Capacitance [F]	DCR [mΩ]	Capacitance [F]	DCR [mΩ]
LIC1030RS3R8206	-30 ~ +70 Over +70 ~ +85	3.8 3.5	2.2 2.5	20±15%	Under 250	Over 10.2	Under 4000	Within initial spec. ※Charging voltage is 3.5V when above 70°C	
LIC1235RS3R8406				40±15%	Under 125	Over 20	Under 2000		
LIC1840RS3R8107				100±15%	Under 60	Over 51	Under 1000		
LIC2540RS3R8277				270±15%	Under 60	Over 115	Under 1000		

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our product specification sheets. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our website (<http://www.ty-top.com/>).

■ RELIABILITY DATA

Items	Spec. value	Test methods and remark
1. Operating temperature range and usable voltage range	-30°C to +70°C: 2.2V to 3.8V Over +70°C to +85°C: 2.5V to 3.5V	
2. Soldering heat resistance	Capacitance: Within initial spec. DCR: Within initial spec. Appearance: No noticeable abnormality.	Material: Sn-3Ag-0.5Cu Soldering iron temperature : 390±5°C Duration: 3sec The soldering iron of the above conditions is applied twice to the lead wire (+ pole, - pole) 1 mm away from the cell main body.
3. Floating charge characteristics -1	Capacitance: Over 80% of initial spec. DCR: Under 1.5 times of initial spec. Appearance: No noticeable abnormality.	Apply 3.8V to capacitor for 1000 hours at 70°C and measure the floating charge characteristics after returning to normal temperature and humidity.
4. Floating charge characteristics -2		Apply 3.5V to capacitor for 1000 hours at 85°C and measure the floating charge characteristics after returning to normal temperature and humidity.
5. Heat cycle characteristics		Leave the capacitor in below condition, and measure the characteristics after returning to normal temperature and humidity. Temperature: 85±2°C, -40±2°C Duration: 30 min Cycle Numbers: 100 cycles
6. Floating Charge Characteristics in high temperature and high humidity		Leave the capacitor in below condition, and measure the characteristics after returning to normal temperature and humidity. Temperature: 60±2°C Humidity: 90~95%RH Applied Voltage: 3.8V Duration: 500hours
7. Shock resistance		According to JIS C 60068-2-27 Half-sine wave A=294
8. Vibration resistance		Apply a sine wave vibration of 1.5mm amplitude and frequency 10-55Hz, for 2 hours per each direction (X,Y and Z), total 6 hours.

► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our product specification sheets. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our website (<http://www.ty-top.com/>).

CYLINDER TYPE LITHIUM ION CAPACITORS

■ PRECAUTIONS

- 1. This product possesses the voltage from the shipment time, so appropriate consideration is needed at the time of the previous handling and using before assembling into the set. In order to use the product safely, be sure to read the "Instruction Manual" posted on our website**
- 2. Use within the usable voltage range**

Applying voltage exceeding the maximum working voltage may cause leakage or damage. Also, when discharging to a voltage lower than the minimum operating voltage, it'll be the cause which advances degradation such as capacity reduction and internal resistance increase.
Avoid using it deviating from the maximum working voltage and the minimum working voltage.
- 3. Use within the operating temperature range**
- 4. Lifetime of lithium ion capacitor is finite**

The life of the product is affected by operating temperature and operating voltage. In addition, the internal resistance rises gradually with usage and the capacity drops.
- 5. There are temperature dependence and voltage dependence in the electrical characteristics**

The electrical characteristics of the product vary depending on operating temperature and voltage. Please check the temperature characteristics before using the product.
- 6. Lithium ion capacitor has polarity**

Check the polarity before use. It will be damage if it is reversely charged. Avoid using products with reverse voltage applied.
- 7. Don't short-circuit positive (+) and negative (-) lead terminals**

If a positive lead terminal (+) and a negative lead terminal (-) are contacted each other or connected by induction tools, Lithium ion capacitor will be short-circuited and excessive current will be drained.
As a result, internal temperature will rise, internal pressure will rise and in some case leak will occur and gas may be released by opening a pressure valve.
Following actions will cause external short circuit

 - To trim two terminals by a nipper at once.
 - To measure a distance of two terminals by a metal slide gauge .
 - To mount on a circuit board by wave soldering.

Avoid using products short-circuited once.
- 8. Be aware of the ripple current and use in circuits that repeat sudden charge and discharge**

Lithium ion capacitor may be used in a circuit that repeats sudden charge / discharge or application of high ripple current may cause the life to be shortened due to heat generation. Please inquire when using it for such a circuit.
- 9. Mind the voltage drop during discharge (backup)**

If the discharge current is large, a voltage drop occurs at the start of discharge. Be careful about discharge current.
- 10. Be aware of when connecting in series and parallel.**

When lithium ion capacitors are connected in series, the balance of the applied voltage may be lost, and some capacitors may be overcharged or over discharged. Please use so that the voltage of each lithium ion capacitor is within the working voltage range. Also, when lithium ion capacitors are connected in parallel, pay attention to the balance of charge / discharge current of each lithium ion capacitor.
- 11. Lithium ion capacitor has the pressure release vent**

In case of inside pressure of capacitor excessively rising, the pressure release vent will be opened in order to release inner gas. Following clearance (Diameter $\phi 18$: over 2mm, Diameter $\geq \phi 18$: over 3mm) should be made above the pressure release vent.
Don't set up wiring or a pattern in the upper part of the pressure release vent, so that the high temperature gas is gushed when the pressure release vent open.
The product which open the pressure release vent cannot use.
- 12. Insulation of the aluminum case and sleeve of lithium ion capacitor is not guaranteed**

There is a possibility of short-circuiting when the circuit pattern is arranged under the lithium-ion capacitor or when it comes in contact with other parts.
- 13. Environmental of usage**

If the lithium ion capacitor is used in high humidity or alkaline and acidic atmosphere, the lead terminal and outer can may be corroded and the circuit may be disconnected. In addition, condensation may occur in sudden temperature change and remarkable high humidity environment, causing electrolyte leakage.
- 14. Pay attention to external stress**

Lithium ion capacitors are weak parts for mechanical shock. Be careful not to drop the product or apply strong force to the main body and lead terminal. Also, if you apply excessive vibration or shock after mounting, stress such as grasping, tilting, pushing, twisting, etc., the soldered part may come off or the lead terminal part may be damaged.
- 15. Be careful not to apply excessive heat when mounting**

If excessive heat stress is added to the product, electric characteristics deterioration and electrolyte leakage may occur.
Soldering conditions should be within the range specified in the delivery specifications.

16. Please consult about substrate cleaning after soldering

There are cases where the product may be adversely affected depending on the type of solvent and washing conditions, so please consult in advance.

17. Storage

Keep following cautions for storage of Lithium ion capacitor.

- Don't store in the high temperature and the high humidity condition and a place where receiving direct sunlight. Storing Lithium ion capacitor in the room condition of 10 °C – 35 °C and less than 65% relative humidity is recommended. Sudden temperature change or high humidity may cause deteriorating of its characteristics and solderability.
- Don't store Lithium ion capacitor near water, salt water or oil, and in the dew condensation, gasified oil or salinity filled place.
- Don't store Lithium ion capacitor in the hazardous gas (hydrogen sulfide, sulfurous, chlorine, ammonia, bromine, methyl bromine, ozone and etc.) .
- Don't fumigate by halogen fumigant.
- Don't store Lithium ion capacitor near acid or alkaline solvent.
- Don't store Lithium ion capacitor in a place where exposed to ultraviolet or radioactive rays.
- Don't store Lithium ion capacitor in a place where vibration and shock might occur.

18. Disposal

When disposing the lithium ion capacitor, cover and insulate the lead terminal part with tape etc. so as not to cause a short circuit between the (+) pole and the (-) pole, dispose properly with a decree or the regulation a local public organization designates.

19. Usage

Lithium ion capacitor is developed on the assumption that this product will be used in the memory-backup & RTC for usage of information & communication equipment, home electronics, audio & visual equipment, office equipment, etc. Consult us about using high reliability and safety required products such as medical equipment, transportation equipment, industrial equipment, flight / space equipment and emergency equipment, etc.

20. Other Notice

- Don't heat or throw Lithium ion capacitor into fire.
- Don't short-circuit.
- Don't solder directly to a cell body (except lead terminal).
- Don't open a body.
- Don't deform.
- Don't apply pressure.
- In case of emergency firing, please extinguish with fire extinguisher corresponding to water prohibition or sand etc, not water.

※All of the contents specified herein are subject to change without notice due to technical improvements, etc.

※Please see JEITA RCR-2377 for details.

JEITA RCR-2377

「Safety application guide for lithium ion capacitor (LIC)」

[Japan Electronics and Information Technology Industries Association. Established in November, 2013]
